

1A




DTC P0105-H / P0105-L (C17)

DTC Detecting Condition and Trouble Area

DTC detecting condition	Trouble area
P0105-H: IAP Sensor #1 Circuit High Voltage The sensor output voltage is higher than the specified value.	<ul style="list-style-type: none">• Vacuum passage between throttle body and IAP sensor #1• IAP sensor #1• IAP sensor #1 circuit• ECM
P0105-L: IAP Sensor #1 Circuit Low Voltage The sensor output voltage is lower than the specified value.	
C17: IAP Sensor #1 Circuit Malfunction The sensor output voltage is not within 0.50 – 4.85 V.	


Wiring Diagram


Refer to [FI System Wiring Diagram](#).

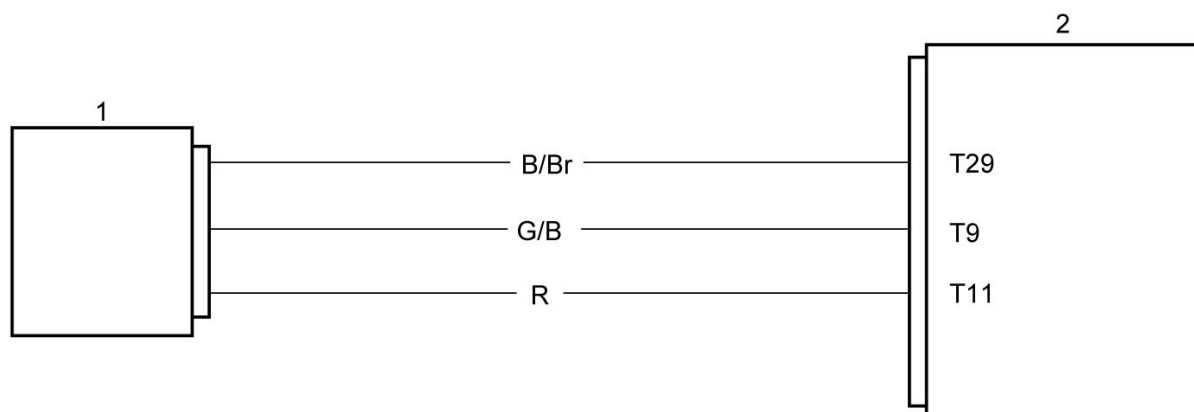

1.	IAP sensor #1	2.	ECM
----	---------------	----	-----

Troubleshooting

Step	Action	Yes	No
1	IAP sensor power supply circuit check 1) Turn the ignition switch OFF. 2) Disconnect the IAP sensor #1 coupler.  3) Check for proper terminal connection to the IAP sensor #1 coupler. 4) If connections are OK, turn the ignition switch ON. 5) Measure the voltage between the R wire and B/Br wire.	Go to Step 3.	Go to Step 2.

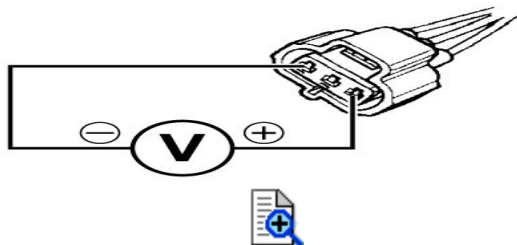


Is voltage 4.5 – 5.5 V?

2

IAP sensor ground circuit check

- 1) Measure the voltage between the R wire and ground.

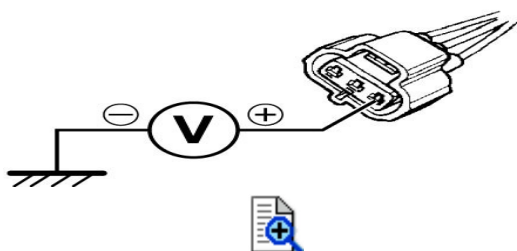

Is voltage 4.5 – 5.5 V?


Repair or
replace the
B/Br wire.

Repair or
replace the R
wire.

3

IAP sensor signal circuit check


- 1) Turn the ignition switch OFF.
- 2) Disconnect the ECM couplers.
- 3) Check for proper terminal connection to the ECM couplers.
- 4) If connections are OK, check the following points.
 - Resistance
 - G/B wire: less than 1 Ω

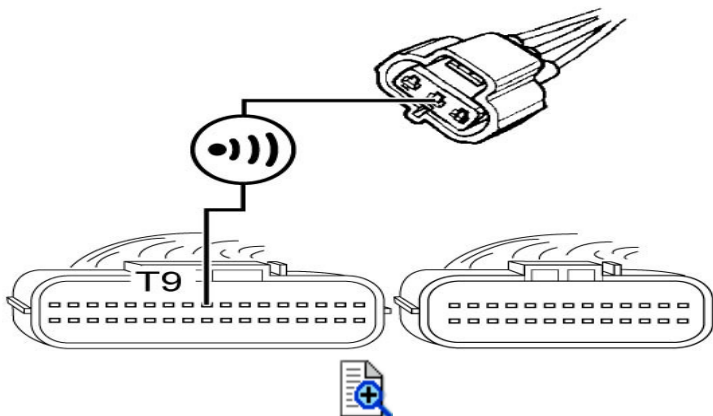


- Between G/B wire and ground: infinity

Go to Step 4.


Repair or
replace the
G/B wire.

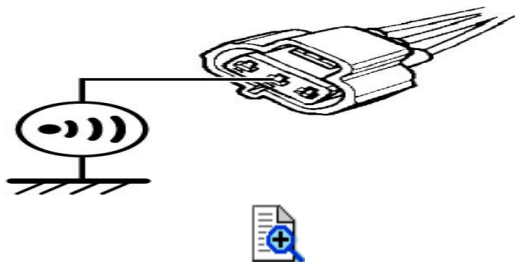

- G/B wire terminal and other terminal at IAP sensor #1 coupler: infinity

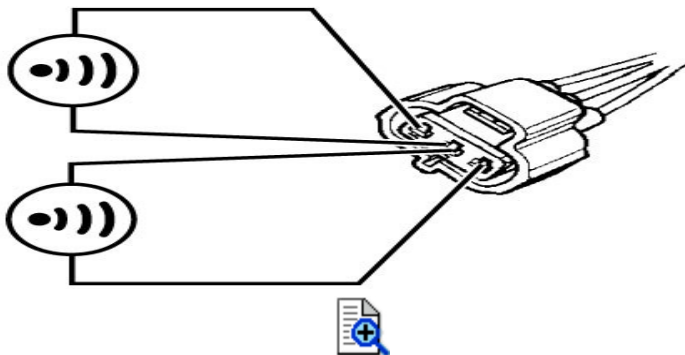

- Voltage
 - Turn the ignition switch ON.
 - G/B wire: approx. 0 V

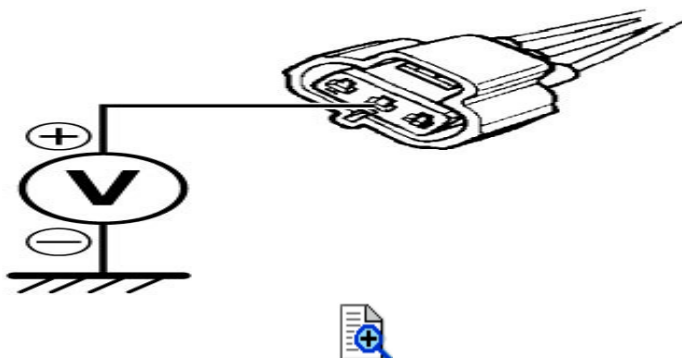


Is check result OK?


4

IAP sensor output voltage at idle speed check

- 1) Turn the ignition switch OFF.
- 2) Connect the ECM couplers and IAP sensor #1 coupler.
- 3) Run the engine at idle speed (atmospheric pressure: approx. 100 kPa (760 mmHg)) and measure the IAP sensor voltage between the G/B wire and B/Br wire.

Go to Step 5.

Check the vacuum hoses for crack or damage. If vacuum hoses are OK, replace the IAP sensor with a new one. 

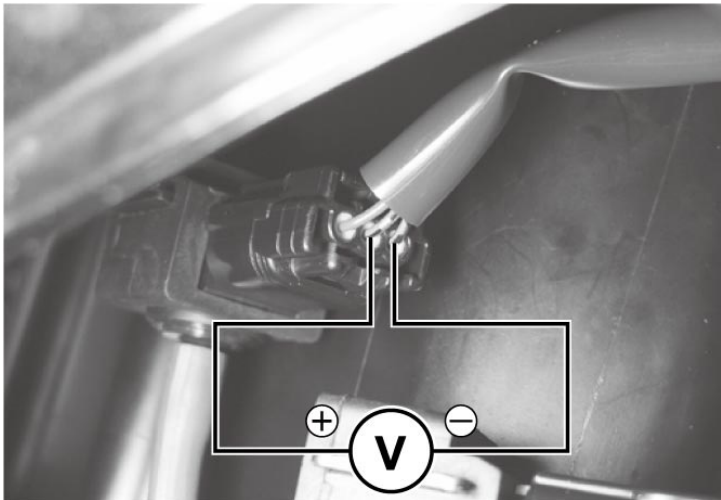

Is voltage approx. 2.5 V?


5

IAP sensor output voltage check

- 1) Turn the ignition switch OFF.
- 2) Remove the IAP sensor #1.
- 3) Connect the vacuum pump gauge to the vacuum port of the IAP sensor.
- 4) Arrange 3 new 1.5 V batteries (1) in series (check that total voltage is 4.5 – 5.0 V) and connect (–) terminal to the ground terminal (2) and (+) terminal to the terminal (3).
- 5) Check the voltage between terminal (4) and ground. Also, check if voltage reduces when vacuum is applied using the vacuum pump gauge.

Special Tool

(A): 09917-47011

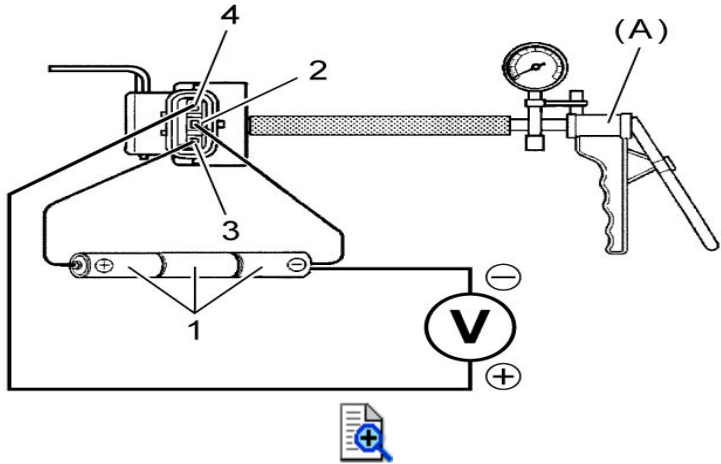

ALTITUDE (Reference)		ATOMOSPHERIC PRESSURE		OUTPUT VOLTAGE
m	ft	kPa	mmHg	V
0 – 610	0 – 2000	100 – 94	760 – 707	3.1 – 3.6
611 – 1524	2001 – 5000	94 – 85	707 – 634	2.8 – 3.4
1525 – 2438	5001 – 8000	85 – 76	634 – 567	2.6 – 3.1
2439 – 3048	8001 – 10000	76 – 70	567 – 526	2.4 – 2.9

Replace the ECM with a known good one, and inspect it again.

Replace the IAP sensor #1 with a new one.



Is check result OK?