


Installation

1. Place the vehicle on the level ground.

NOTE: Support the vehicle securely.

2. Fit the Plate (L) Ⓔ and temporarily tighten the Bolts Ⓒ and Ⓓ as shown.

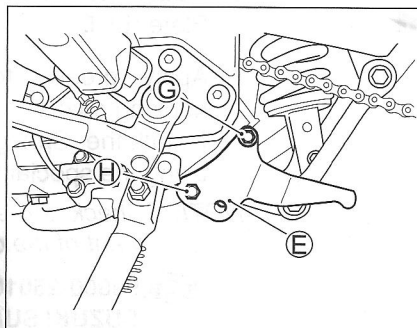

3. Fit the Plate (R) Ⓓ and temporarily tighten the Bolts Ⓐ and Ⓖ as shown.

