

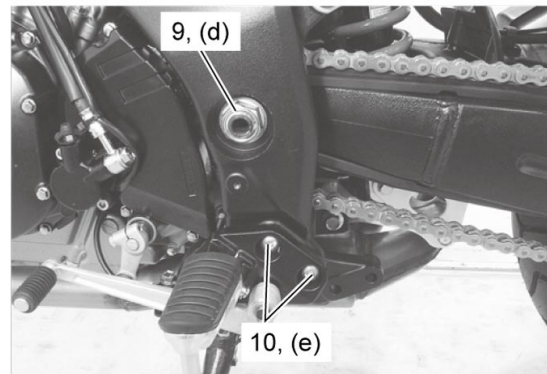
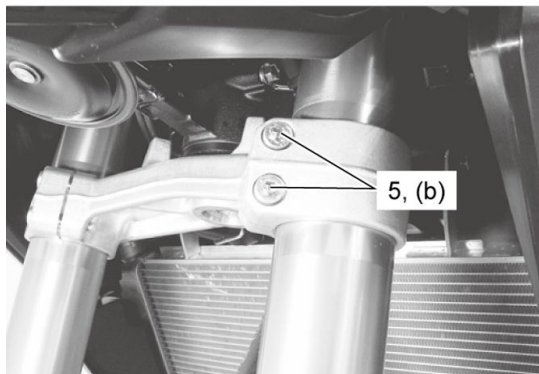
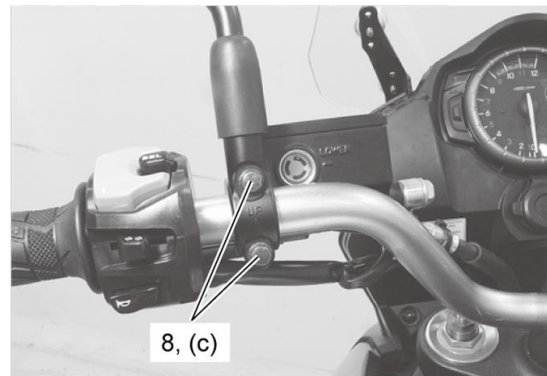
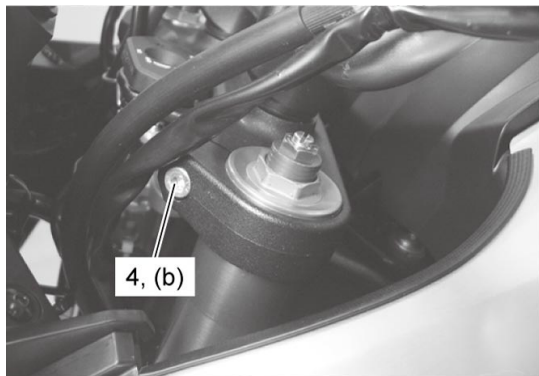


0B






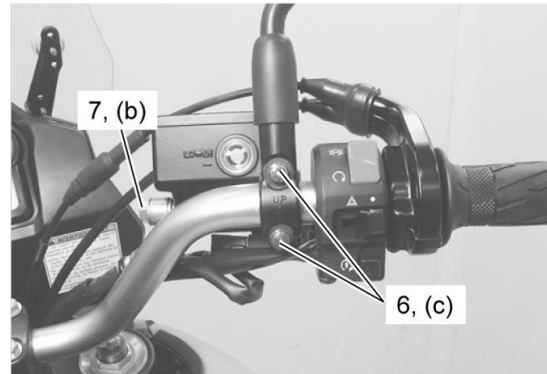


## Chassis Bolts and Nuts Inspection






Check that all chassis bolts and nuts are tightened to their specified torque.

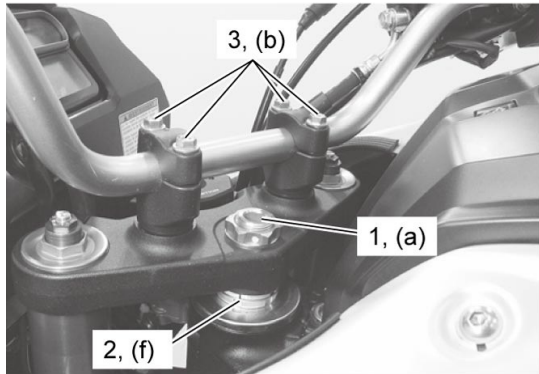

1.	Steering stem head nut	5.	Front fork lower clamp bolt	9.	Swingarm pivot nut	(c):	10 N·m (1.0 kgf-m, 7.5 lbf-ft)
2.	Steering stem lock-nut	6.	Front brake master cylinder mounting bolt	10.	Front footrest bracket bolt	(d):	100 N·m (10.0 kgf-m, 72.5 lbf-ft)
3.	Handlebar clamp bolt	7.	Brake hose union bolt	(a):	90 N·m (9.0 kgf-m, 65.0 lbf-ft)	(e):	26 N·m (2.6 kgf-m, 19.0 lbf-ft)
4.	Front fork upper clamp bolt	8.	Clutch master cylinder mounting bolt	(b):	23 N·m (2.3 kgf-m, 17.0 lbf-ft)	(f):	80 N·m (8.0 kgf-m, 58.0 lbf-ft)

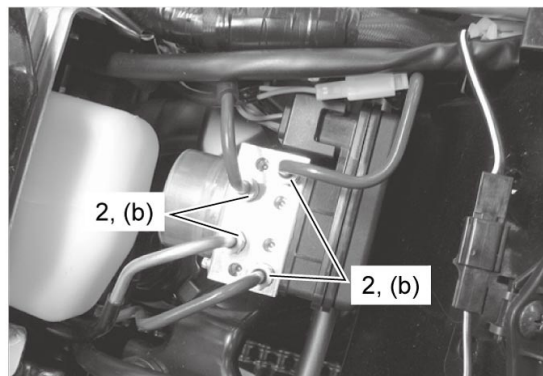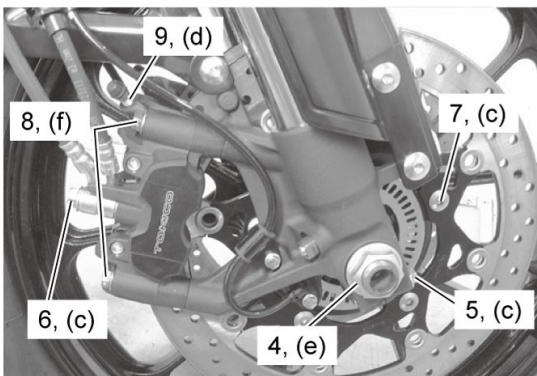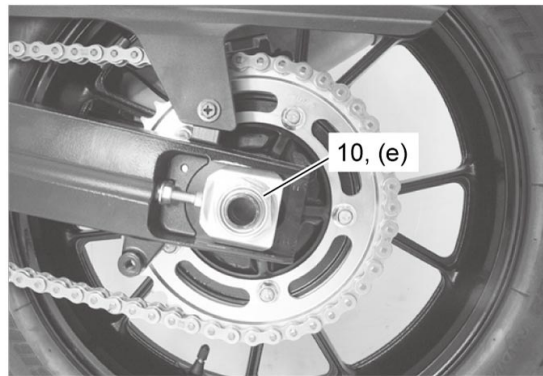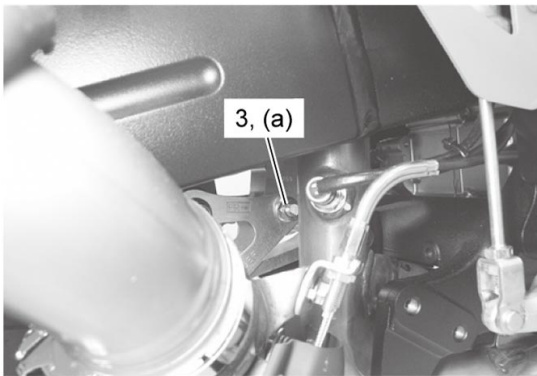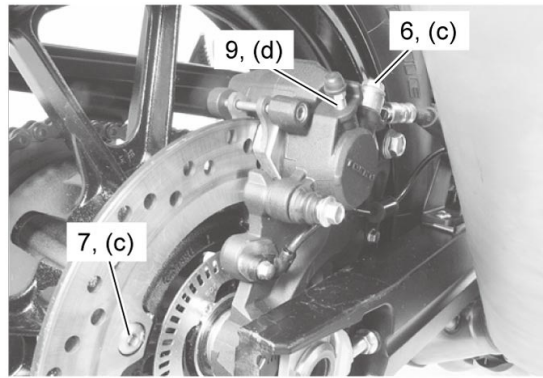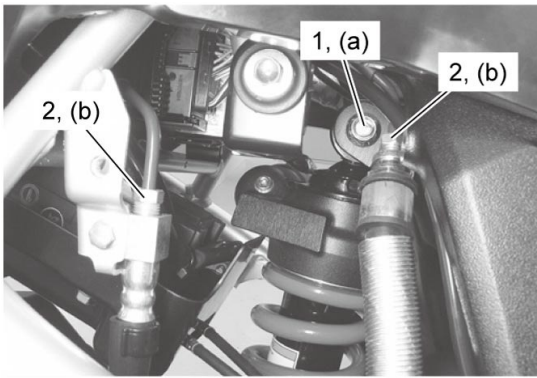

1.	Rear shock absorber upper mounting nut	7.	Brake disc bolt	(c):	23 N·m (2.3 kgf-m, 17.0 lbf-ft)
2.	Brake pipe flare nut	8.	Front brake caliper mounting bolt	(d):	7.5 N·m (0.75 kgf-m, 5.5 lbf-ft)
3.	Rear shock absorber lower mounting nut	9.	Brake air bleeder valve	(e):	100 N·m (10.0 kgf-m, 72.5 lbf-ft)
4.	Front axle nut	10.	Rear axle nut	(f):	39 N·m (3.9 kgf-m, 28.5 lbf-ft)
5.	Front axle pinch bolt	(a):	50 N·m (5.0 kgf-m, 36.5 lbf-ft)		
6.	Brake hose union bolt	(b):	16 N·m (1.6 kgf-m, 11.5 lbf-ft)		

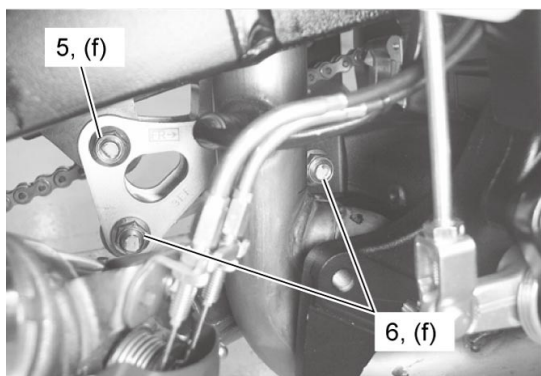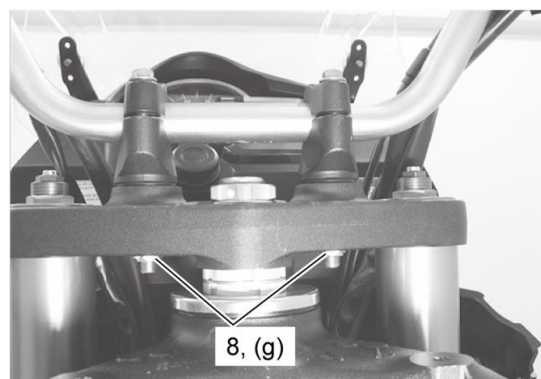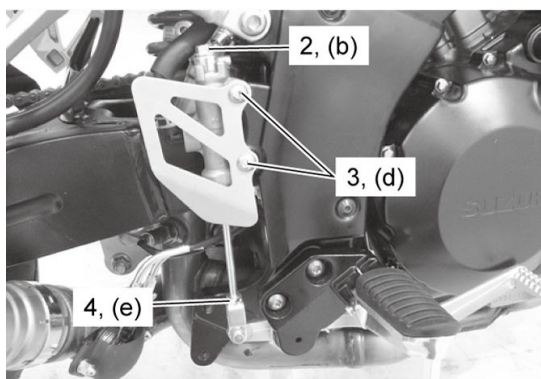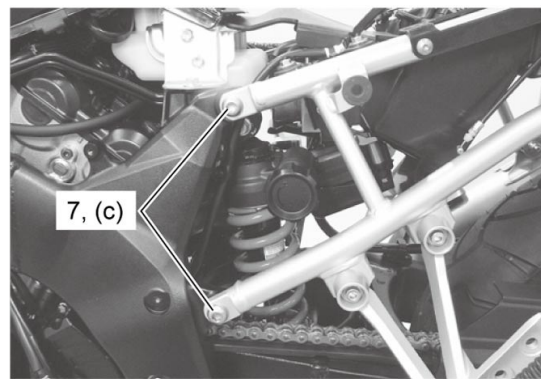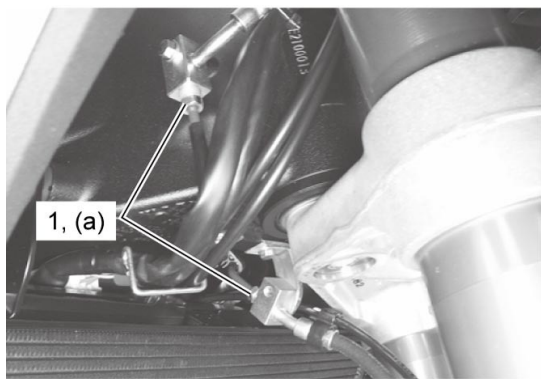

1.	Brake pipe flare nut	6.	Cushion rod mounting nut	(c):	50 N·m (5.0 kgf-m, 36.5 lbf-ft)
2.	Brake hose union bolt	7.	Seat rail mounting bolt	(d):	10 N·m (1.0 kgf-m, 7.5 lbf-ft)
3.	Rear brake master cylinder mounting bolt	8.	Handlebar holder nut	(e):	18 N·m (1.8 kgf-m, 13.0 lbf-ft)
4.	Rear brake master cylinder rod lock-nut	(a):	16 N·m (1.6 kgf-m, 11.5 lbf-ft)	(f):	98 N·m (9.8 kgf-m, 71.0 lbf-ft)
5.	Cushion lever mounting bolt	(b):	23 N·m (2.3 kgf-m, 17.0 lbf-ft)	(g):	45 N·m (4.5 kgf-m, 32.5 lbf-ft)