








1C

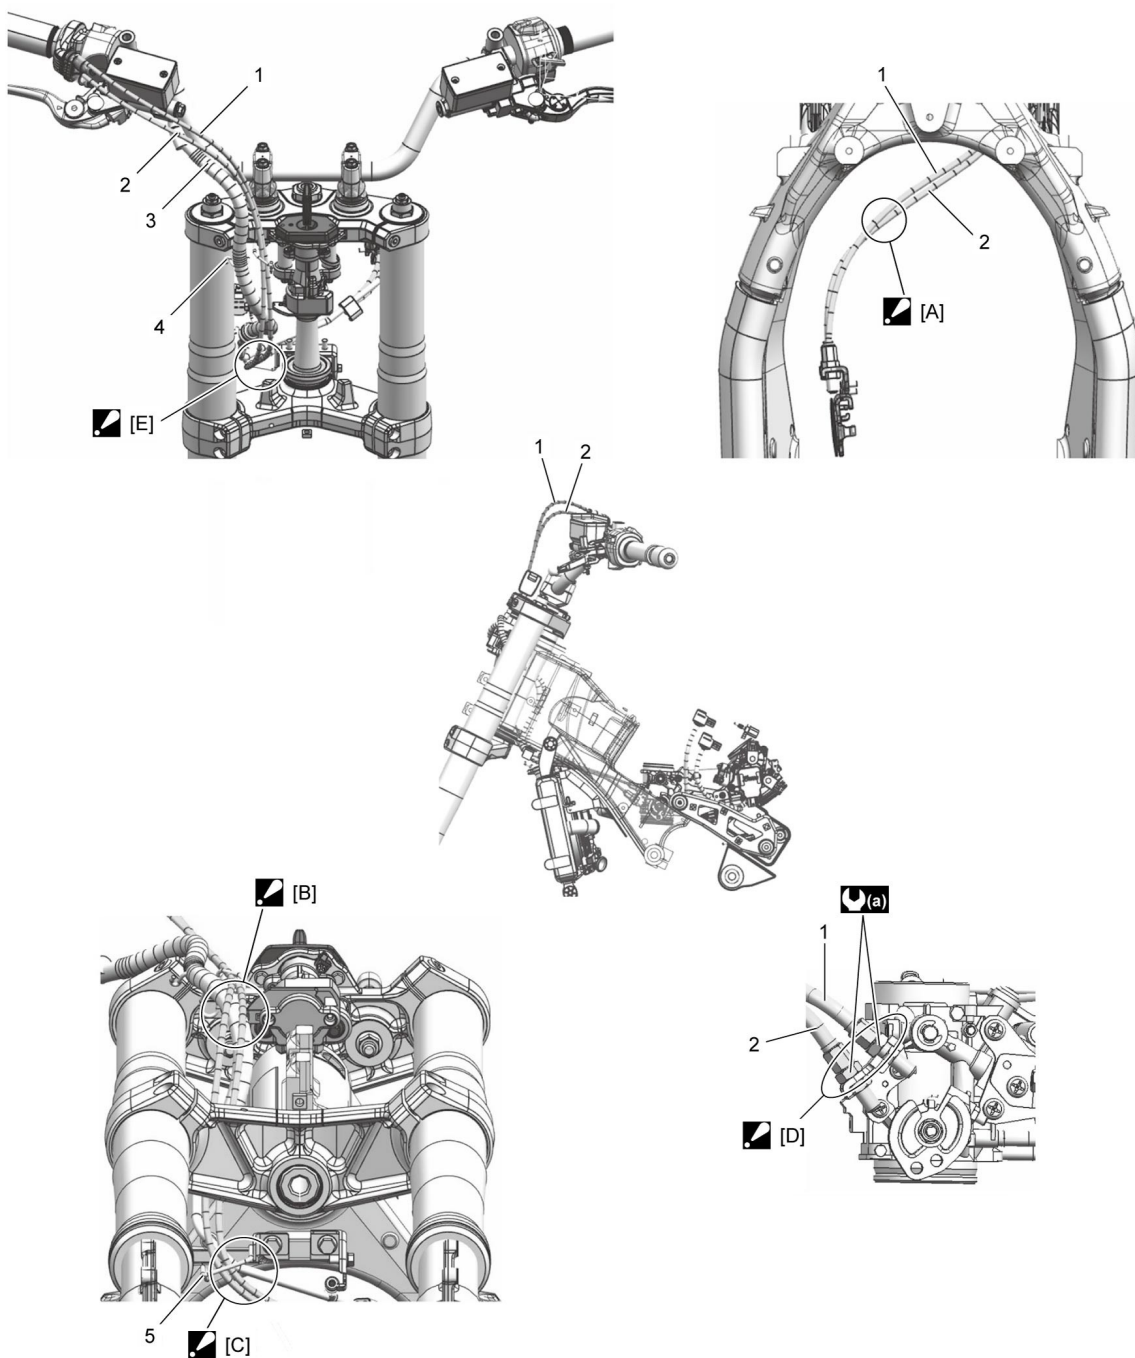

## Throttle Cable Routing Diagram



 [A]:	Pass the throttle pulling cable over the throttle returning cable.	2.	Throttle returning cable
 [B]:	Pass the throttle cables in front of the brake hose.	3.	Front brake hose
 [C]:	Pass the throttle pulling cable inside of the throttle returning cable. Pass the throttle cables under the brake pipe.	4.	Cable guide
 [D]:	The clearance between the throttle cable adjuster and the lock-nut is within one turn of the adjuster counterclockwise.	5.	Throttle cable guide

 [E]:	When turning the handlebars to right, check that the throttle cables are not pinched between the stopper and frame.	 (a):	4.5 N·m (0.45 kgf-m, 3.5 lbf-ft)
1.	Throttle pulling cable		