




Starter Button Inspection

- 1) Turn the ignition switch OFF.
- 2) Remove the air cleaner box.
- 3) Disconnect the right handlebar switch coupler (1).

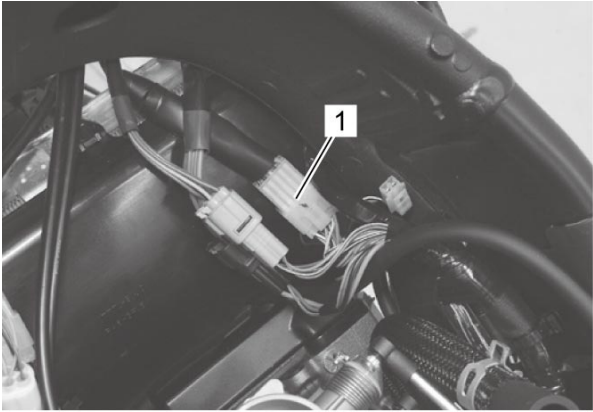

- 4) Inspect the starter button for continuity with a tester.
If any abnormality is found, replace the right handle switch assembly with a new one.

| Color Position | O/W | Y/G | O/R | Y/W |
|-------------------|-------|-----|-------|-----|
| . | | | ○ — ○ | |
| PUSH | ○ — ○ | | | |



- 5) After finishing the starter button inspection, install the removed parts.