



2B



## Front Fork Components

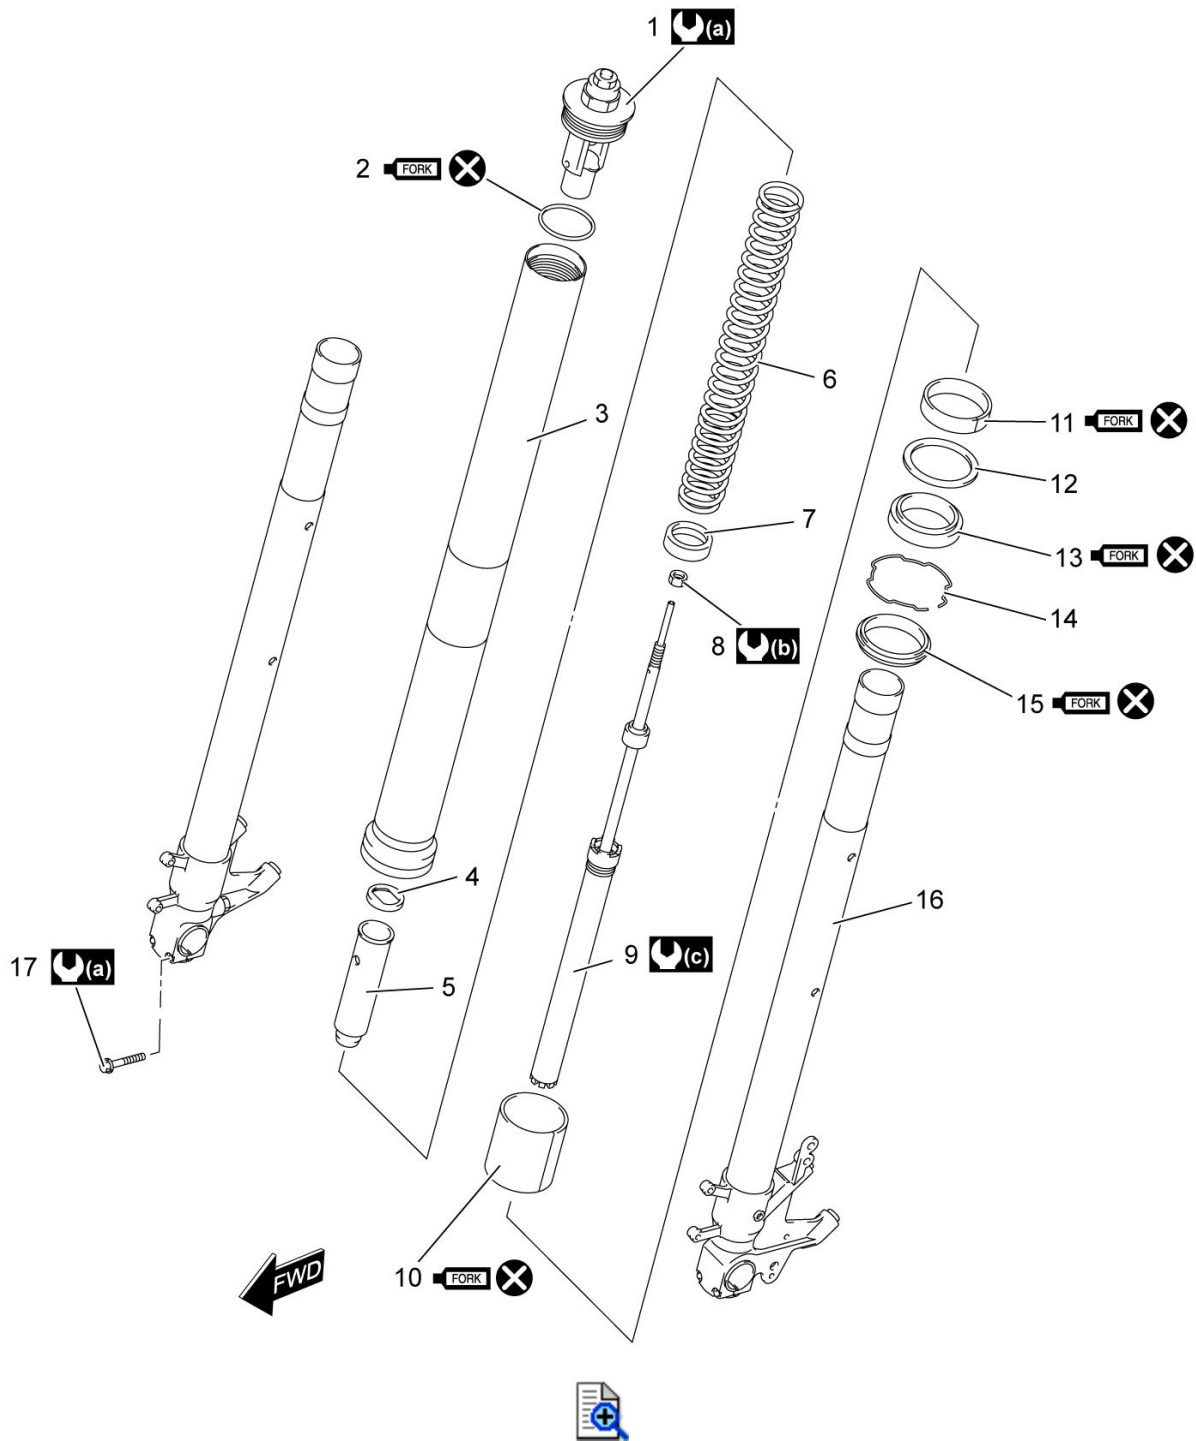

1.	Front fork cap bolt	7.	Spring seat	13.	Oil seal		15 N·m (1.5 kgf-m, 11.0 lbf-ft)
2.	O-ring	8.	Lock nut	14.	Oil seal stopper ring		70 N·m (7.0 kgf-m, 51.0 lbf-ft)
3.	Outer tube	9.	Inner rod/damper rod	15.	Dust seal		Apply fork oil.
4.	Spring retainer	10.	Inner tube slide metal	16.	Inner tube		Do not reuse.

5.	Spacer	11.	Outer tube slide metal	17.	Front axle pinch bolt		
6.	Spring	12.	Oil seal retainer	 (a):	23 N·m (2.3 kgf-m, 17.0 lbf-ft)		