

2C




Rear Shock Absorber Removal and Installation


[Reference: Rear Suspension Components](#)

Removal


- 1) Support the motorcycle with a jack to relieve load on the rear shock absorber.
- 2) Remove the rear shock absorber lower mounting bolt and nut (1).

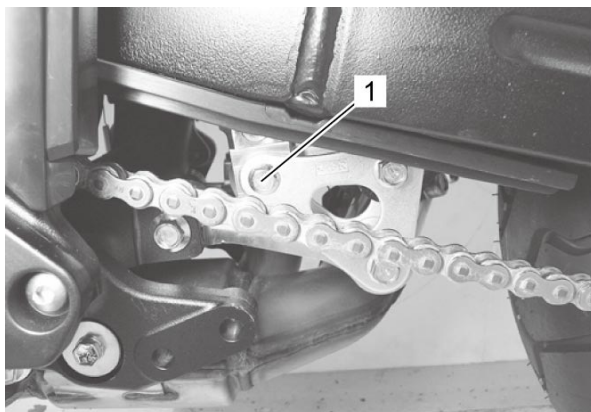

- 3) Remove the rear shock absorber upper mounting bolt and nut (1).

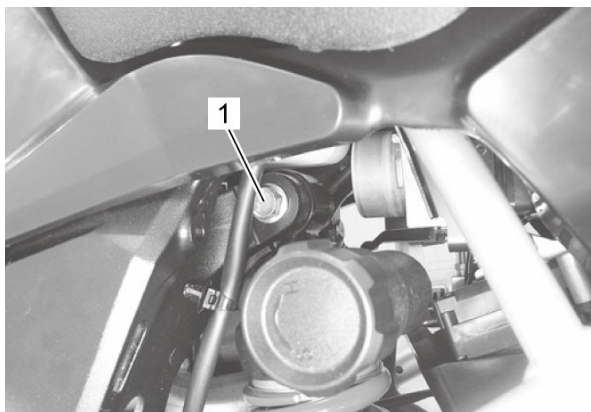


- 4) Remove the rear shock absorber (1) upward.

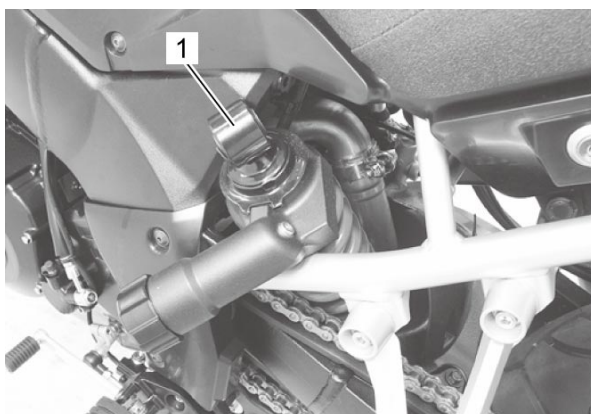



- 5) Remove the spacer (1) from the rear shock absorber.

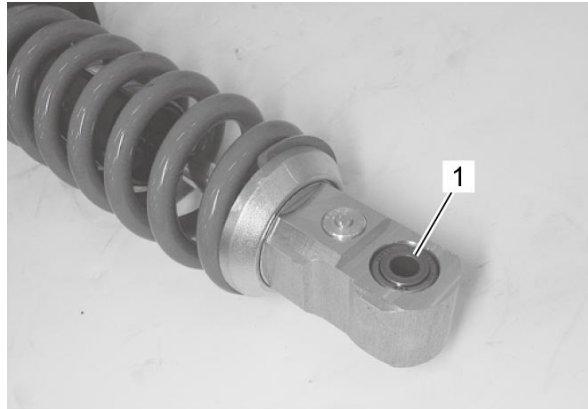

Installation

Reference: Rear Shock Absorber Inspection

- 1) Install the spacer into the rear shock absorber.
- 2) Install the rear shock absorber.
- 3) Insert the rear shock absorber upper/lower mounting bolts from left side, and tighten their new nuts (1) to the specified torque.

Tightening torque

Rear shock absorber mounting nut (a): 50 N·m (5.0 kgf-m, 36.5 lbf-ft)

