










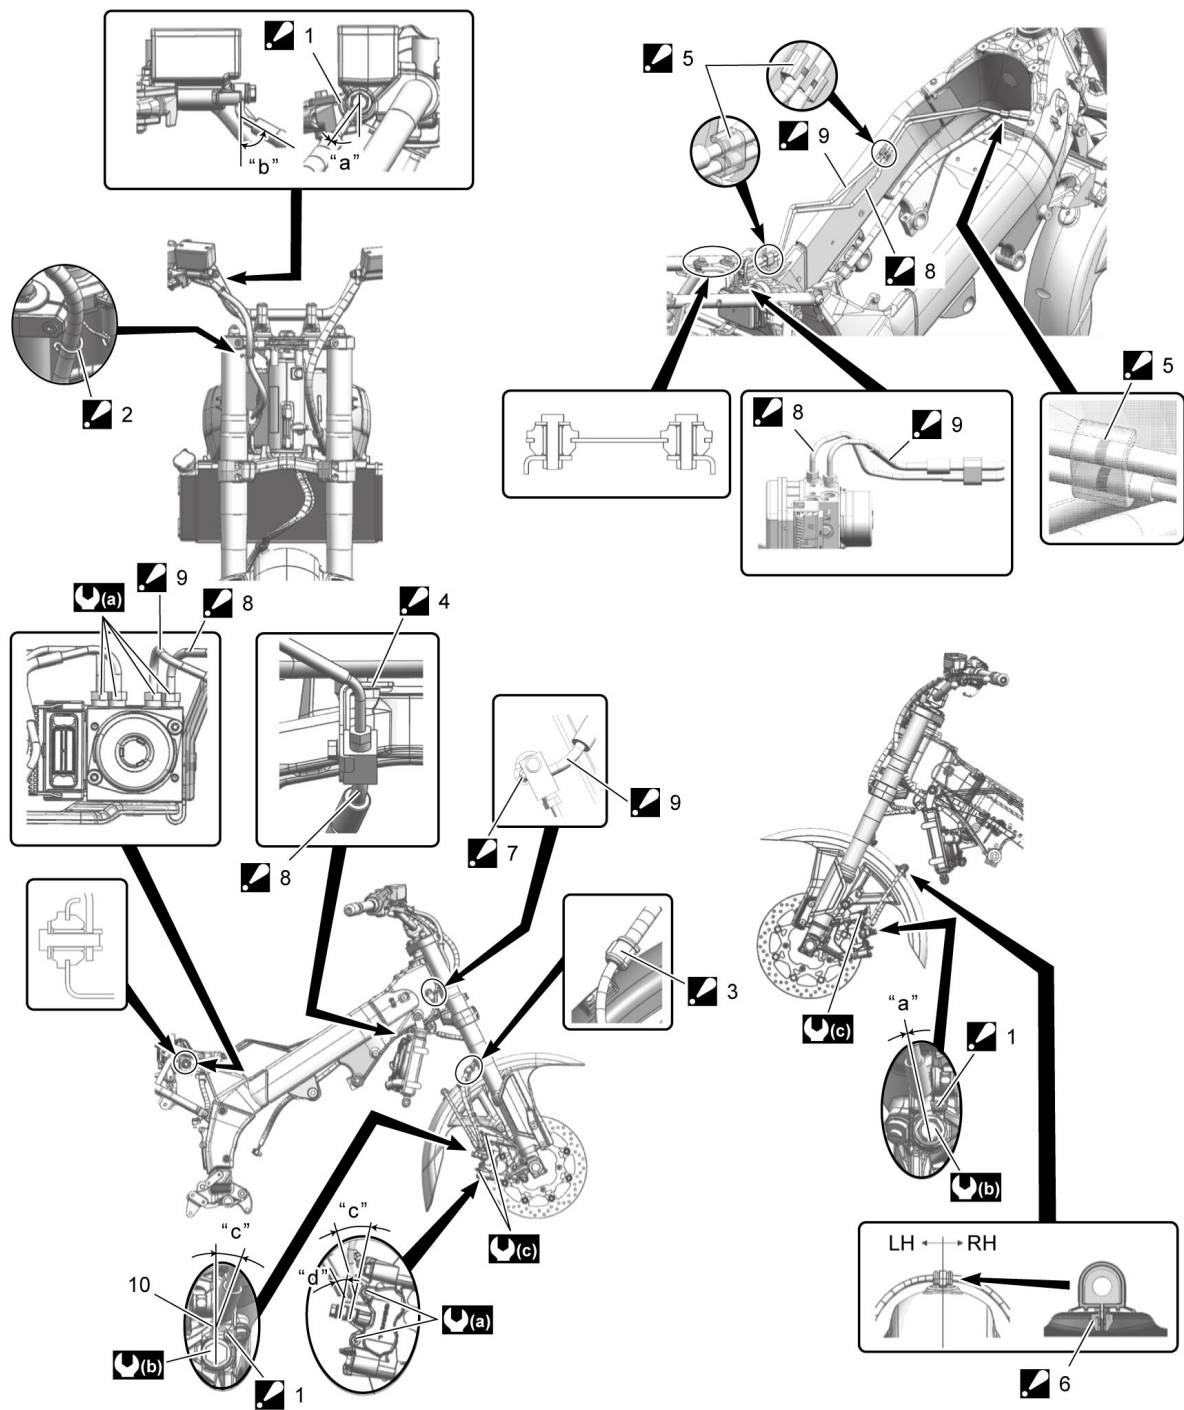



4A



## Front Brake Hose Routing Diagram



 1.	Stopper : After the brake hose union has contacted the stopper, tighten the union bolt to the specified torque.	 7.	Brake hose : After positioning the brake hose with the stopper, tighten the bolt.	"c":	20°
 2.	Guide : Pass the brake hose into the guide.	 8.	Front brake hose : Front brake caliper to ABS control unit/HU.	"d":	40°

 3.	Clamp : Fix the hose sleeve to the clamp firmly.	 9.	Front brake hose : Front brake master cylinder to ABS control unit/HU.	 (a) :	16 N·m (1.6 kgf-m, 11.5 lbf-ft)
 4.	Clamp : After positioning the clamp with the stopper of frame head, tighten the clamp bolt.	10.	White paint	 (b) :	23 N·m (2.3 kgf-m, 17.0 lbf-ft)
 5.	Clamp : Clamp to the marking position of brake pipes.	"a":	0°	 (c) :	18 N·m (1.8 kgf-m, 13.0 lbf-ft)
 6.	Clamp : Insert the clamp end into the hole of the front fender fully.	"b":	56°		