





4E



Front Wheel Speed Sensor Routing Diagram

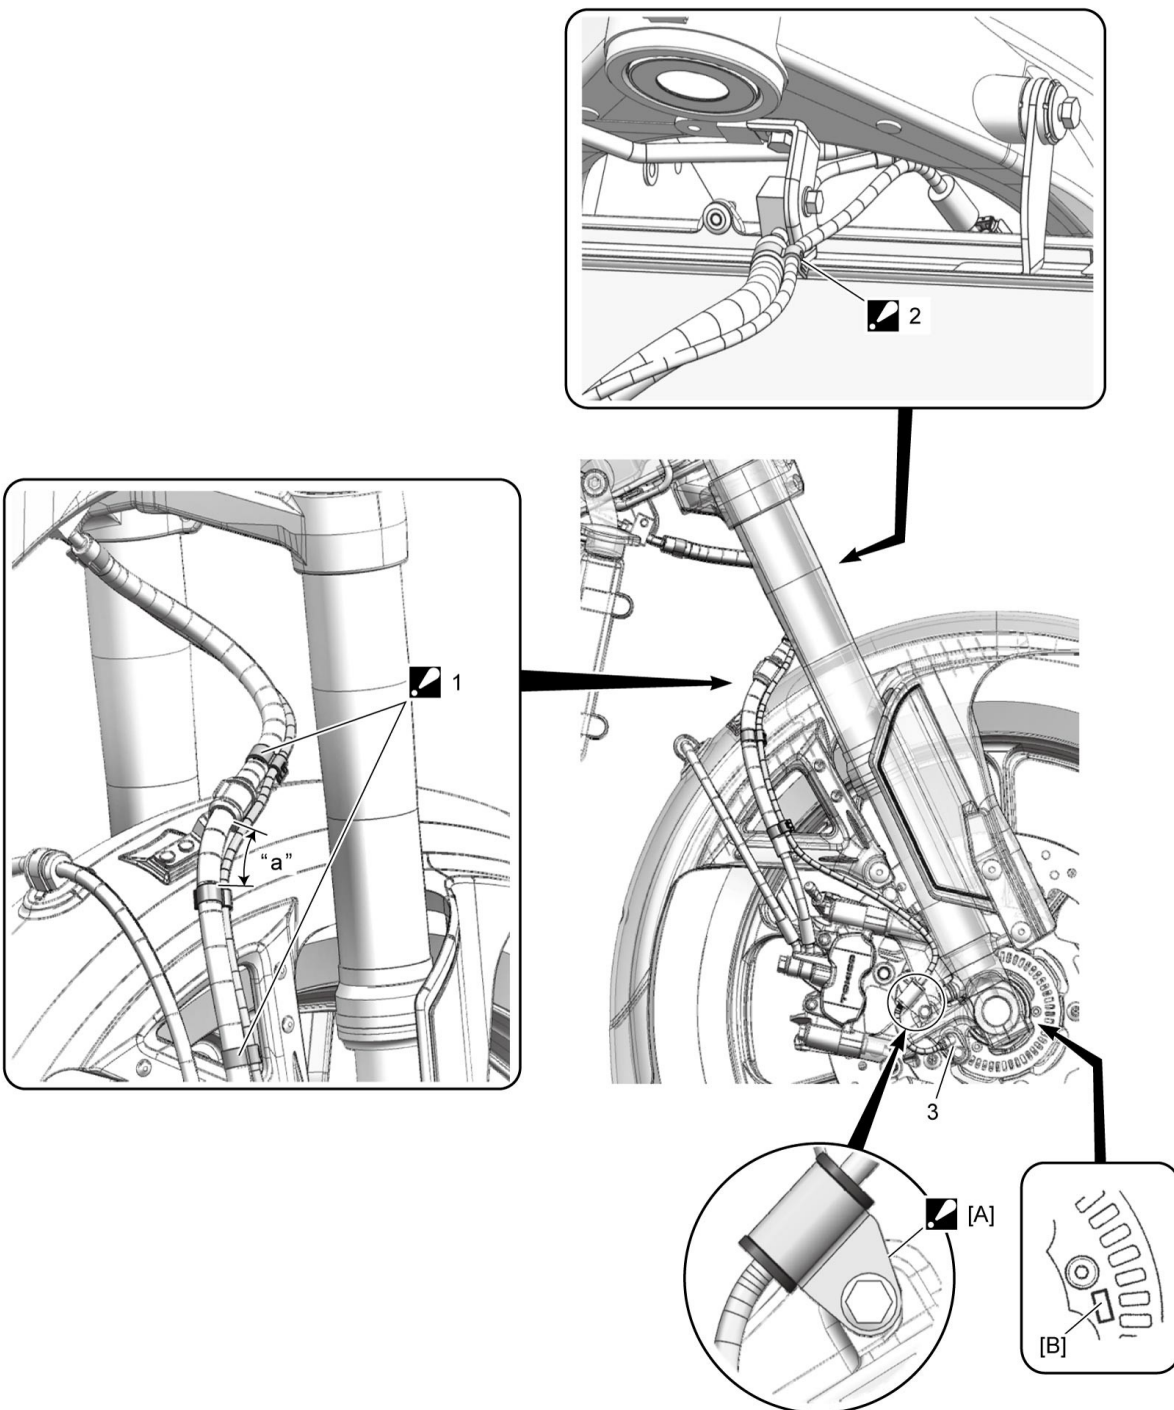

 [A]:	After positioning the clamp with the stopper, tighten the bolt.	 2.	Clamp : Clamp the marking of the wheel speed sensor lead wire to left side of the brake hose end fitting.
[B]:	Outside marking	3.	Front wheel speed sensor
 1.	Clamp : Clamp the marking of the wheel speed sensor lead wire in the front of the brake hose.	"a":	10 – 15 mm (0.4 – 0.6 in)