
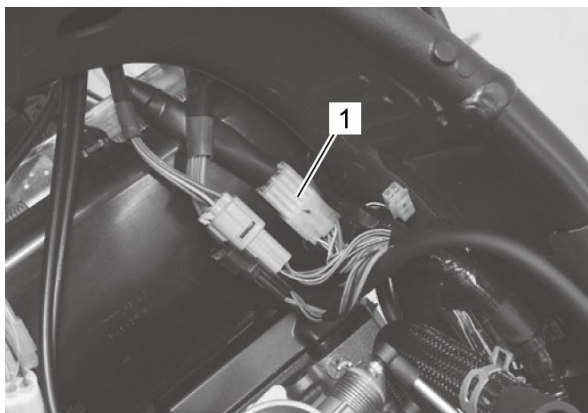



9B






Hazard Switch Inspection

- 1) Turn the ignition switch OFF.
- 2) Remove the air cleaner box. 
- 3) Disconnect the right handlebar switch coupler (1).



- 4) Inspect the hazard switch for continuity with a circuit tester.
If any abnormality is found, replace the right handlebar switch assembly with a new one. 

Color Position	B	Lbl	Lg
OFF			
ON			



- 5) After finishing the hazard switch inspection, reinstall the removed parts.