


9B



Rear Combination Light Removal and Installation

Removal

- 1) Remove the rear fender (rear).
- 2) Remove the screws (1).
- 3) Disconnect the rear combination light coupler (2) and remove the rear combination light (3).

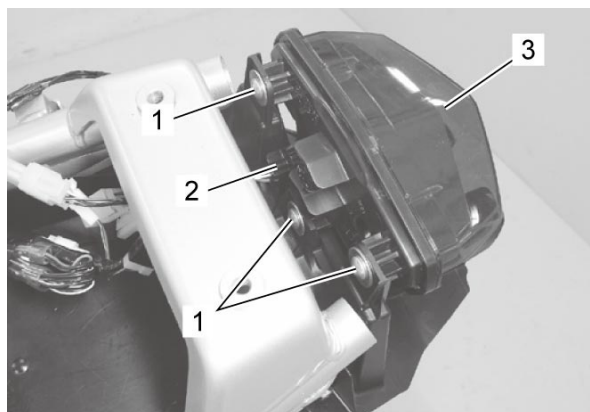

Installation

Install the rear combination light in the reverse order of removal. Pay attention to the following point:

- Tighten the screws in order of (1) → (2) → (3).

