

Combination Meter / Fuel Meter / Horn

General Description

Combination Meter System Description

BENE31J19301001

This combination meter mainly consists of the stepping motor, LCD (Liquid Crystal Display) and LED (Light Emitting Diode).


The pointer is driven by the stepping motor.

The LCDs indicate, Fuel level indicator (5), Engine coolant temperature indicator (6), Ambient air temperature indicator (7), Fuel consumption/Battery voltage indicator (8), TC mode OFF / 1 / 2 indicator (9), Clock (10), Odo / Trip1 / Trip2 / FI (DTC) / Instrument panel light brightness indicator (11), Speed (12) and Gear position / Oil pressure / Engine coolant temperature indicator (13) respectively.

LED (Light Emitting Diode)

LED is used for the illumination light and each indicator light.

LED is maintenance free. LED is less power consuming and more resistant to vibration resistance compared to the bulb.

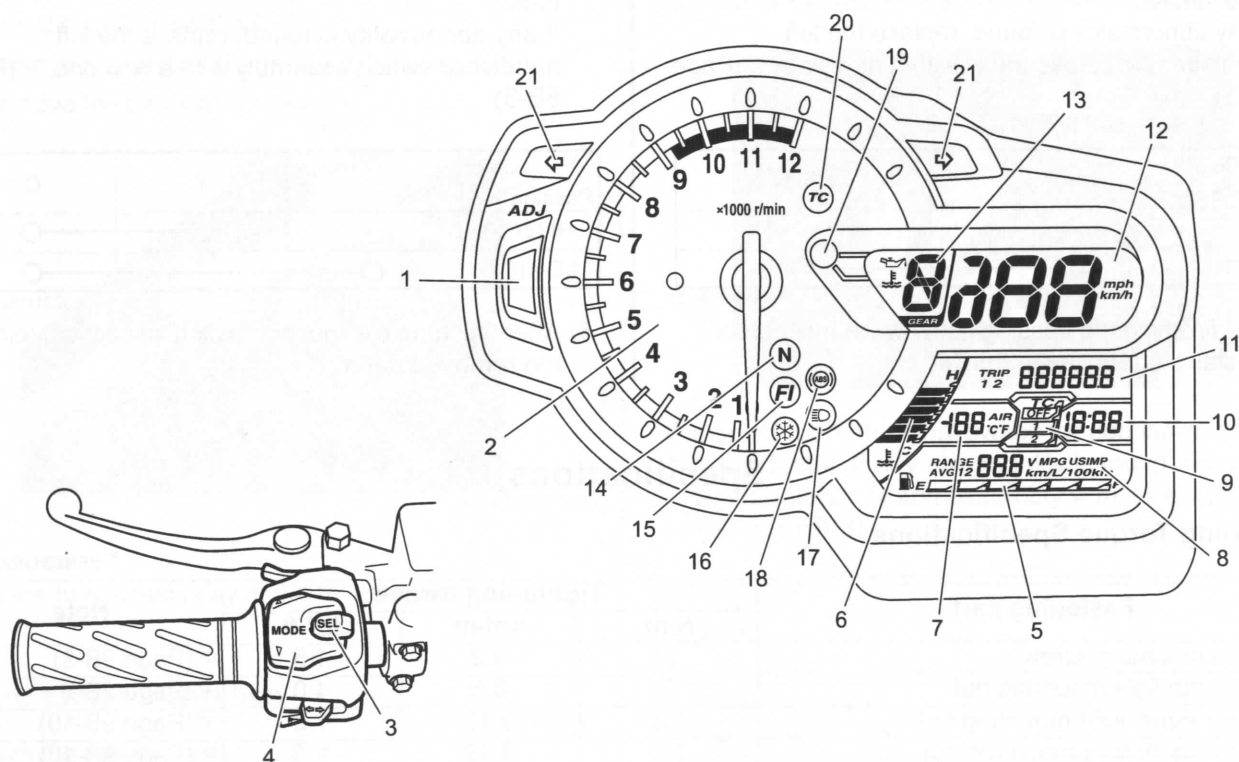

IE31J1930025-03

1. Adjust switch	16. LED (Freeze indicator light)
2. Tachometer	17. LED (Hi beam indicator light)
3. Select switch	18. LED (ABS indicator light)
4. Mode switch	19. LED (Engine coolant indicator light / Oil pressure indicator light)
14. LED (Neutral indicator light)	20. LED (TC indicator light)
15. LED (FI indicator light)	21. LED (Turn signal indicator light)